



# 1 Humbucker, 1 Volume, 1 Tone

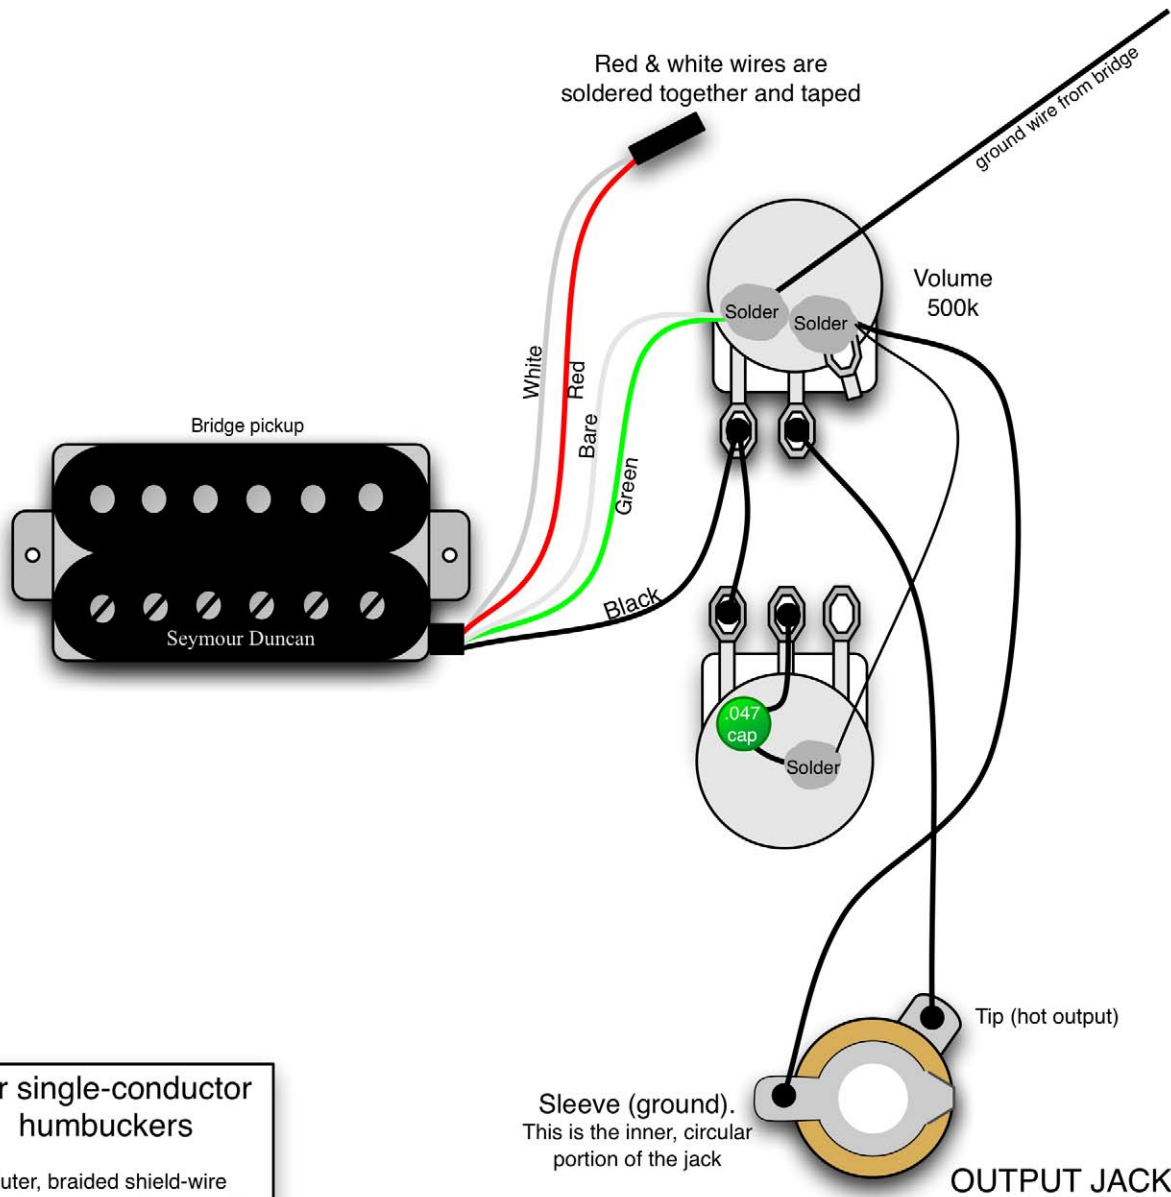


## For single-conductor humbuckers

Outer, braided shield-wire must be connected to ground. (it may be soldered directly to the back of volume pot).



Inner, black cloth wire is the hot output

**Solder** = location for ground (earth) connections.



**Seymour Duncan®**

5427 Hollister Ave. • Santa Barbara, CA. 93111

Phone: 805.964.9610 • Fax: 805.964.9749 • Email: [wiring@seymourduncan.com](mailto:wiring@seymourduncan.com)