



2 Humbuckers, 2 Volumes, 3 Way Switch

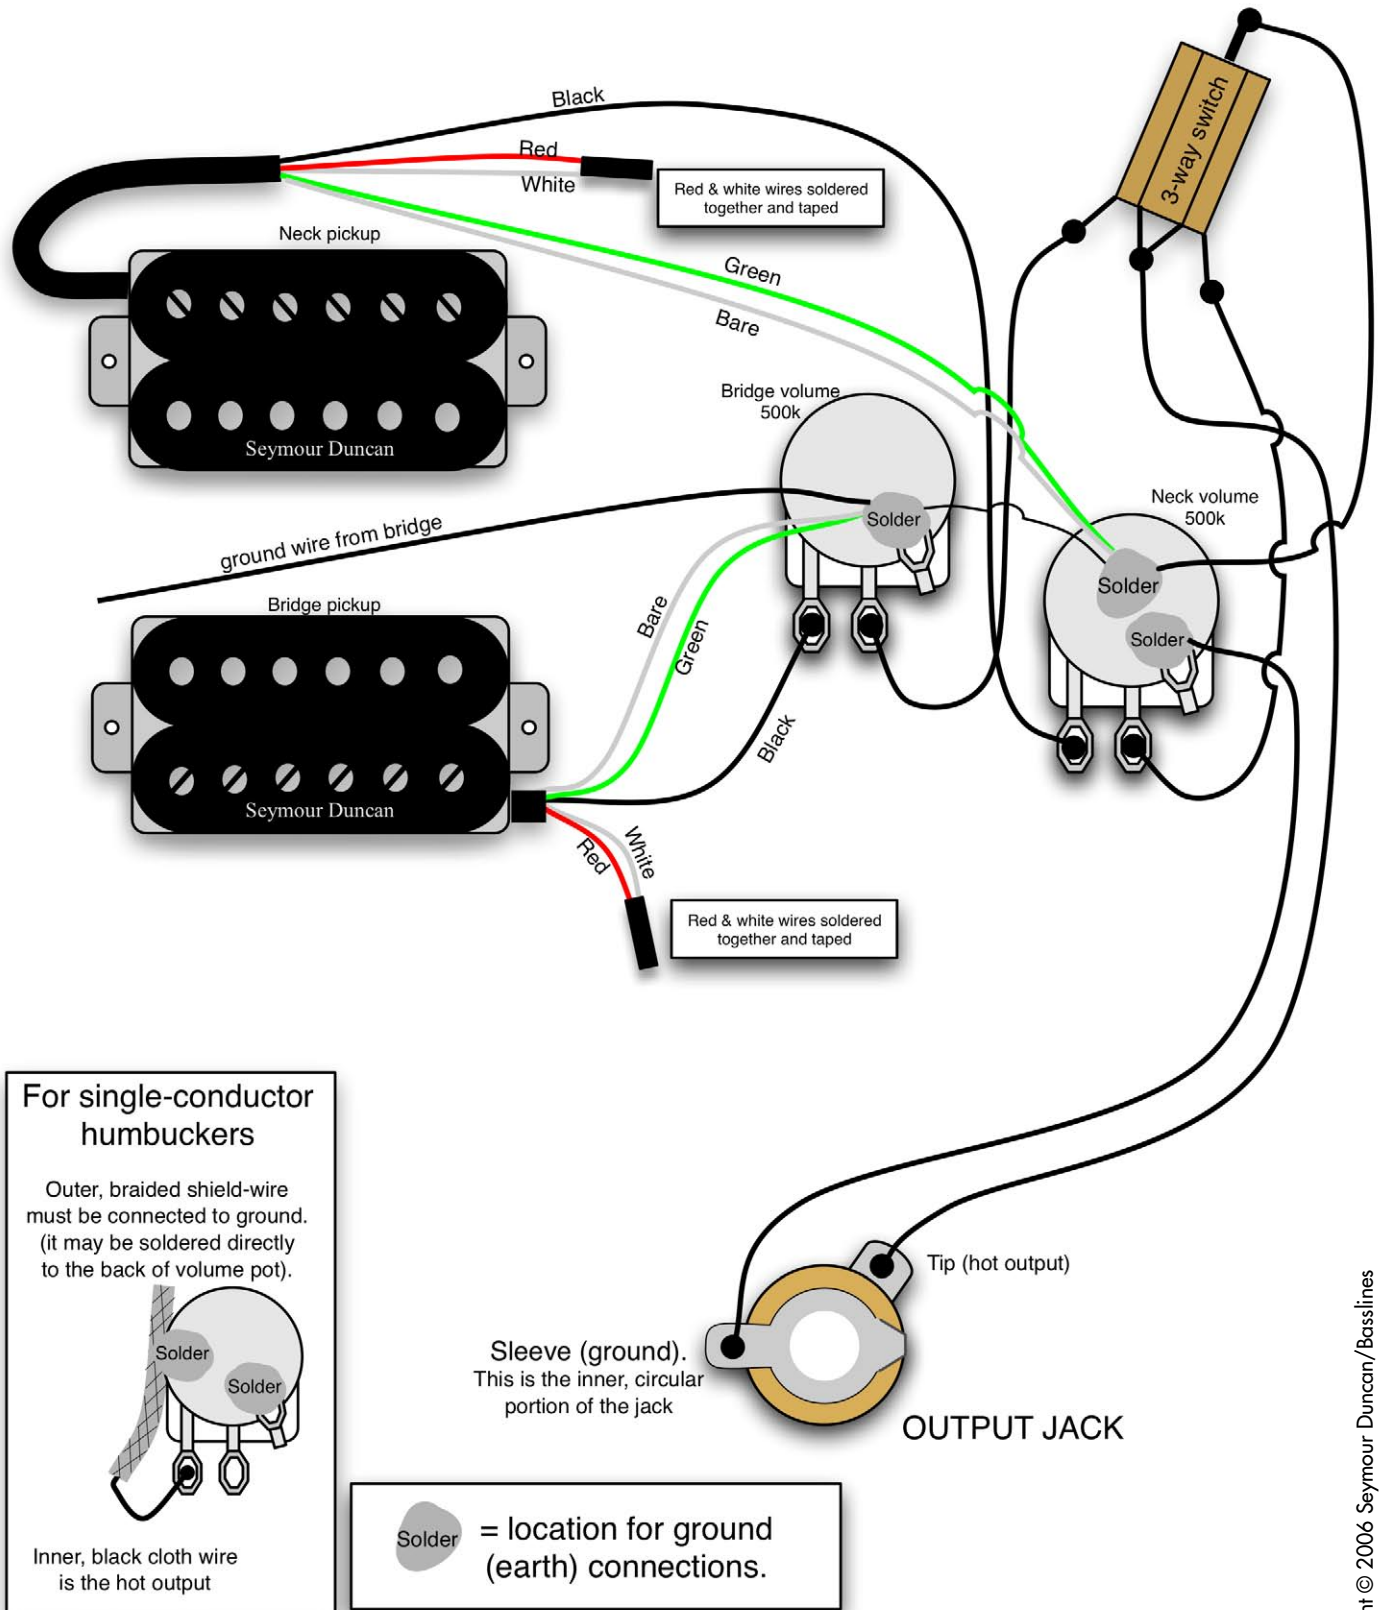

For single-conductor humbuckers


Outer, braided shield-wire must be connected to ground. (it may be soldered directly to the back of volume pot).



Inner, black cloth wire is the hot output

Sleeve (ground). This is the inner, circular portion of the jack

Solder = location for ground (earth) connections.



Seymour Duncan

5427 Hollister Ave. • Santa Barbara, CA. 93111

Phone: 805.964.9610 • Fax: 805.964.9749 • Email: wiring@seymourduncan.com