
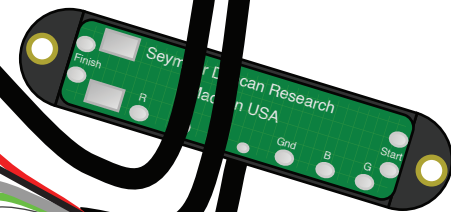


EVERYTHING AXE SET | 1 VOLUME 2 TONES | 5 WAY BLADE

Seymour
Duncan®

Here at Seymour Duncan, we encourage you to use and share these wiring diagrams freely. But, it really hurts our feelings if you use them in commercial use without prior written permission. Switching the wiring of your guitar is a practically free way to get new tones out of your guitar... Now go have fun!



Red & white soldered together and taped off

Red & white soldered together and taped off

Green & bare wires from all pickups get soldered here.
For middle pickup, green, bare and WHITE must be soldered here

Ground wire to bridge

Tip (hot output)

Sleeve (ground).
The inner, circular portion of the jack

Output Jack

Solder = location for ground (earth) connections.

5-way switch

Volume 250k

Tone 250k

.047 cap

Tone 250k

Solder

Solder

Solder

neck black

middle black & red

bridge black